
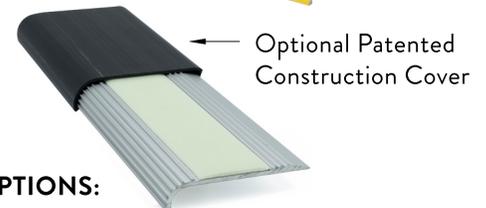
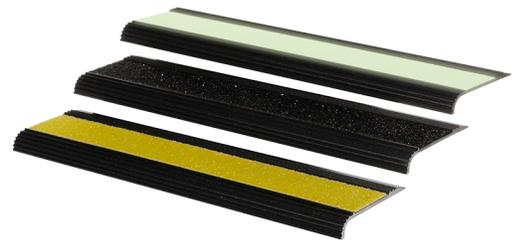


STNR | SURFACE MOUNT NOSINGS

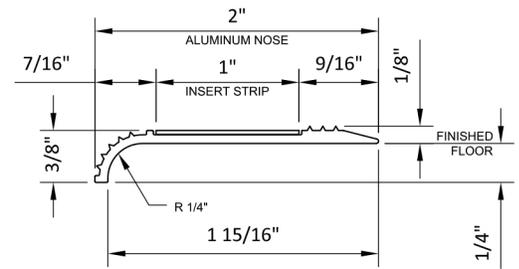

Low profile 2" wide anodized aluminum nosing with beveled edge. Replaceable 1" Photo-Glo® photoluminescent strip.

- Leading edge improves slip resistance
 - ANSI A137.1 slip testing; Wet DCOF of .42, Dry .50
- For checker plate, aluminum, concrete or wood applications
- 6063 T5 anodized aluminum
- Unlimited recharging lasts at least 25 years with Photo-Glo®
- Glow-in-the-dark technology activated by natural, fluorescent, incandescent or LED light
- Provided cut to fit; up to 12 feet, to the nearest 1/16 inch
- Easy to install for a permanent solution

For nosings used in:

- High Rise Buildings
- Hospitals
- Assisted Living
- Stadiums
- Schools
- Commercial Buildings

Code compliant in all 50 states and Canada:

Exceeds ASTM E2072 glow requirements

Code compliant: IBC / IFC / NFPA 101 / OSHA / ADA

UL 410 & UL 1994 listed



Warranty Information

Stair Nosing – 5 year warranty
Photo-Glo® – 25 year warranty



OPTIONS:

- Black or Yellow powder coated aluminum
 - 1 7/8" ribbed non-anodized aluminum available
- 1" patented Photo-Glo® or acrylic photoluminescent strip
- 1" black or yellow traction strip
- 3M VHB peel and stick adhesive or Bostik 1100FS
- Patented Construction Cover



Safe-T-Nose®
LEAVE NO DOUBT • THIS WAY OUT • EXIT SAFELY

MADE IN THE
USA

WWW.SAFETNOSE.COM • 855-723-6673